


VOLA 100, 100X, 200, 200V, 300  
 VOLA 400DV, 400, 400V, 400N, 400NV, 400T  
 VOLA 400TV, 400F, 400FV, 400R, 400RV  
 VOLA 2100, 2100X, 2200, 2200V, 2300, 2400  
 VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV  
 VOLA 2400F, 2400FV, 2400R, 2400RV

Monteringsvägledning

NB.  
 Boxen leveraras inte av VOLA.  
 Utan köps genom ÅF eller Grossist.

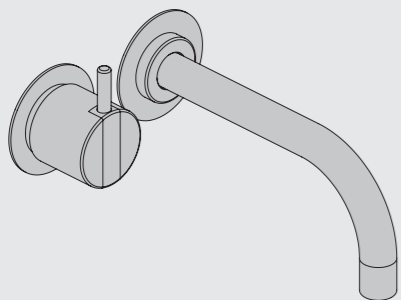

www.vola.com

SE\_100-2100\_V2 40998364  
 11-07-2024




Data, 3 Bar/43.5 Psi:

|        | l/min. | Gal/min. |
|--------|--------|----------|
| 100:   | 18,3   | 4.8      |
| 400V:  | 15,6   | 4.1      |
| 2100:  | 25,2   | 6.7      |
| 2400V: | 22,2   | 5.9      |


Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Installasjonsexempel: 2400NV

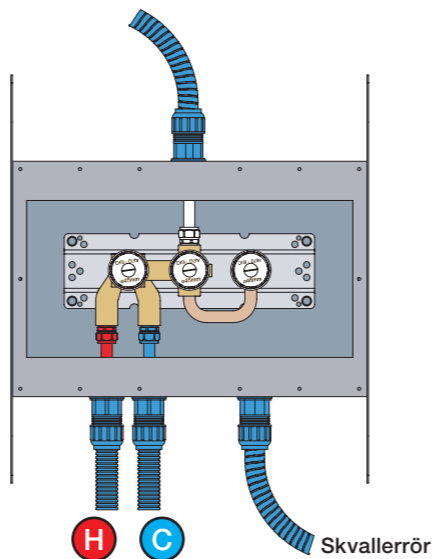


Förlängning

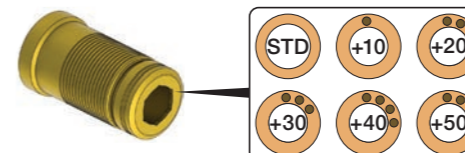

T Min. 15 mm  
 Max 65 mm

Y Min. 48 mm  
 Max. 110 mm

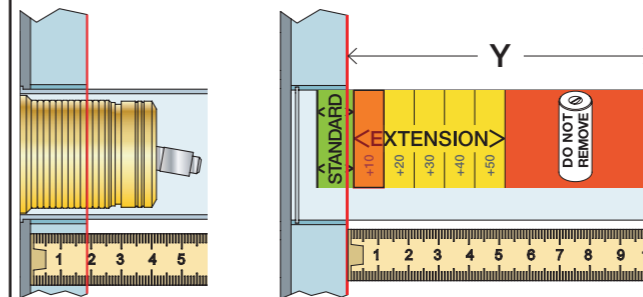


| T          | Y           | VR1260/2260/1400/1020K |
|------------|-------------|------------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                   |
| 15 - 25 mm | 98 - 88 mm  | +10 STANDARD SVERIGE   |
| 25 - 35 mm | 88 - 78 mm  | +20                    |
| 35 - 45 mm | 78 - 68 mm  | +30                    |
| 45 - 55 mm | 68 - 58 mm  | +40                    |
| 55 - 65 mm | 58 - 48 mm  | +50                    |

Förlängning, eftermontering

\* +10 - STANDARD SVERIGE


100 - 400:  
 62 - 0 mm

X 62 - 0 mm

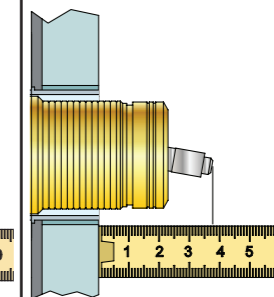

2100 - 2400:

X 57 - 0 mm

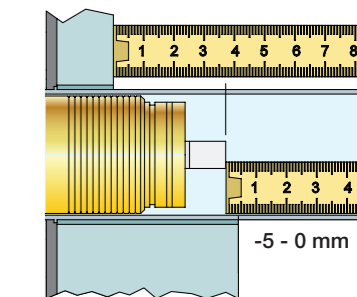


| X          | VR1260 + VR1400 + VR1020K |
|------------|---------------------------|
| 50 - 52 mm | Std.                      |
| 40 - 50 mm | +10                       |
| 30 - 40 mm | +20                       |
| 20 - 30 mm | +30                       |
| 10 - 20 mm | +40                       |
| 0 - 10 mm  | +50                       |


| X          | VR2260 + VR1400 + VR1020K |
|------------|---------------------------|
| 45 - 57 mm | Std.                      |
| 35 - 45 mm | +10                       |
| 25 - 35 mm | +20                       |
| 15 - 25 mm | +30                       |
| 5 - 15 mm  | +40                       |
| -5 - 5 mm  | +50                       |

|   | L                 | L1               | L2               | H               |
|---|-------------------|------------------|------------------|-----------------|
| A | 220 mm<br>8 1/2"  |                  |                  |                 |
| B | 318 mm<br>12 1/2" | 78 mm<br>3 1/16" |                  | 95 mm<br>3 3/4" |
| C |                   |                  |                  |                 |
| D |                   |                  |                  |                 |
| E | 396 mm<br>15 1/2" |                  | 156 mm<br>6 1/8" |                 |


A 100, 2100, 200V, 2200V, 400V, 2400V

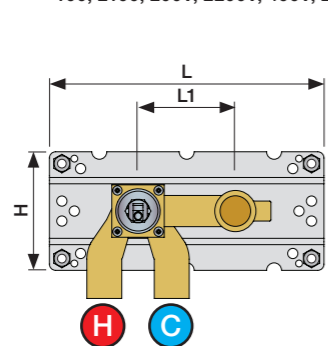


C 300, 2300

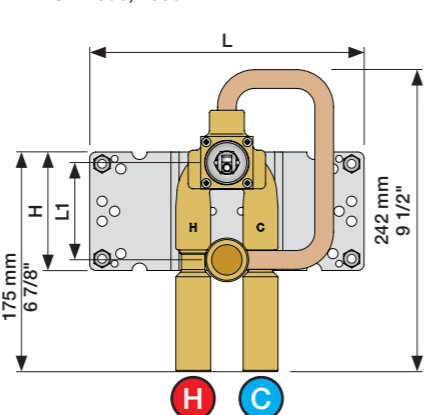


D 400NV, 2400NV, 400TV, 2400TV

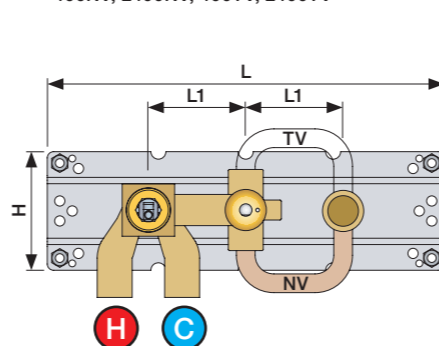

B 100X, 2100X

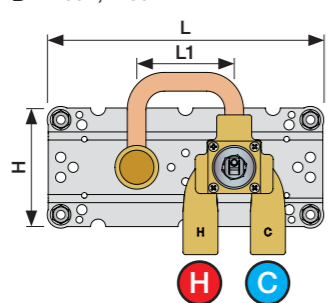


E 400FV, 2400FV, 400RV, 2400RV

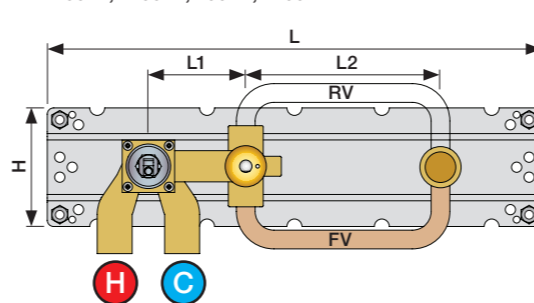


Montering av förlängning


VR1260+

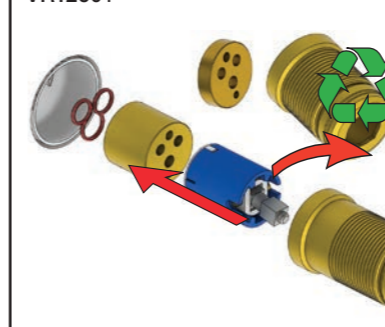


VR2260+

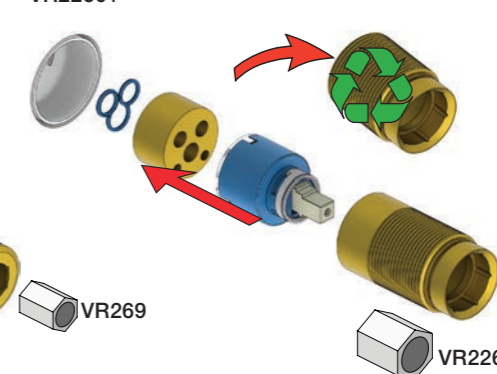


VR1020K, VR2019+, VR2119+

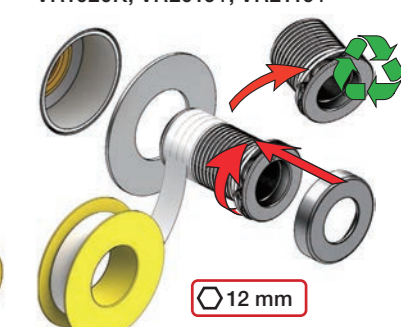

VR1400+







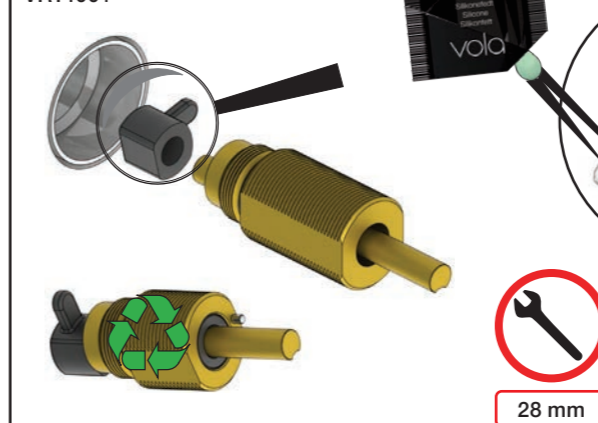


400-2400

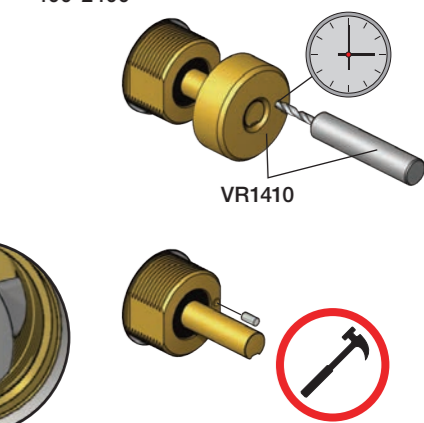

1 Demontera sidofixturerna.  
Ta inte bort ljudisolering och Skyddskåpor.

NB.  
Boxen levereras inte av VOLA.  
Utan köps genom ÅF eller Grossist.

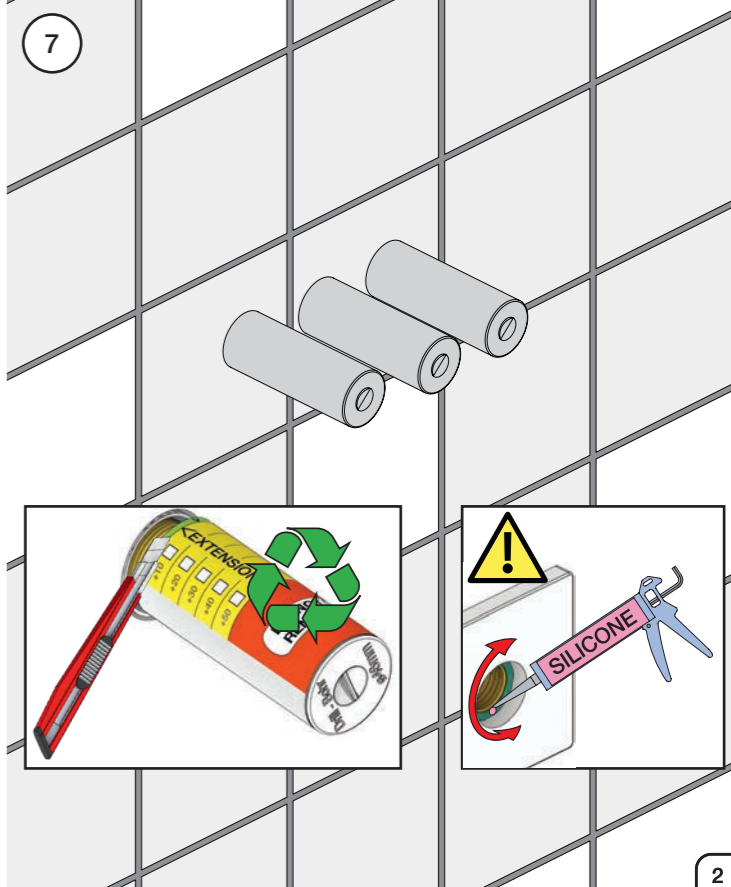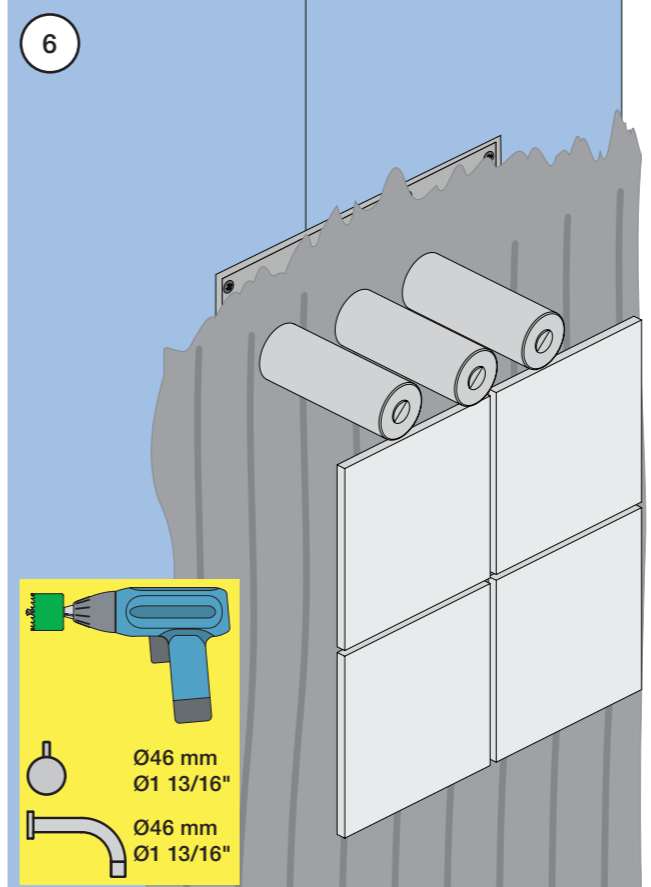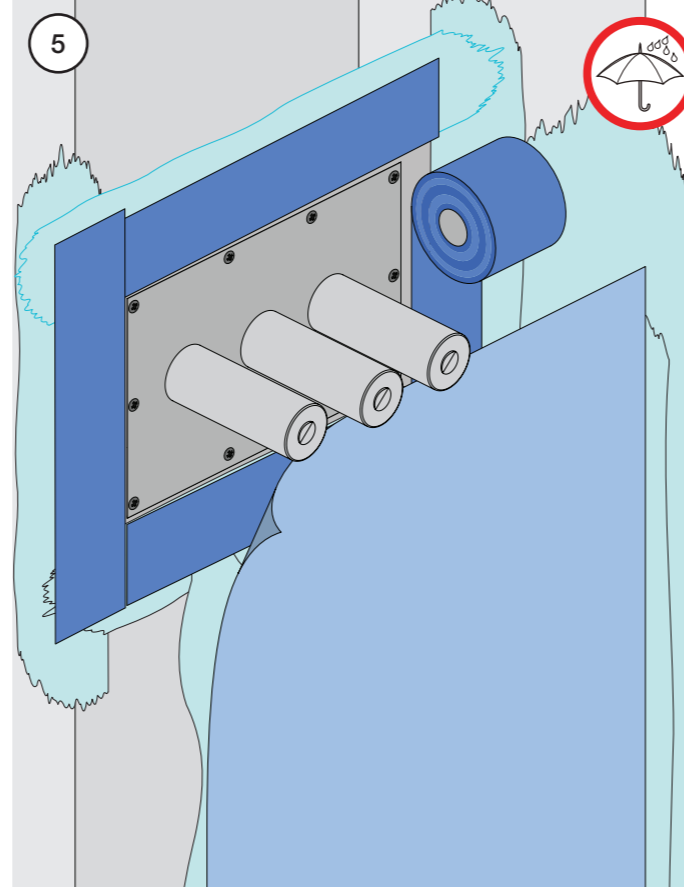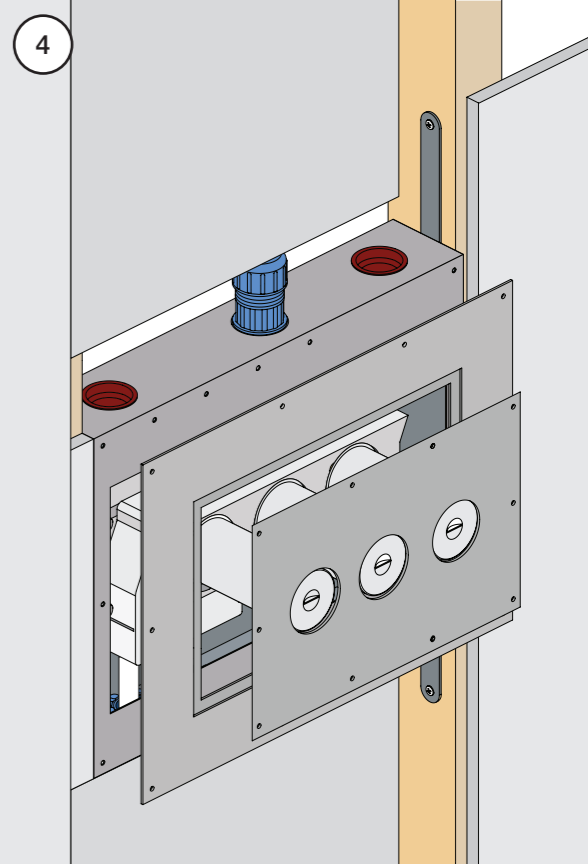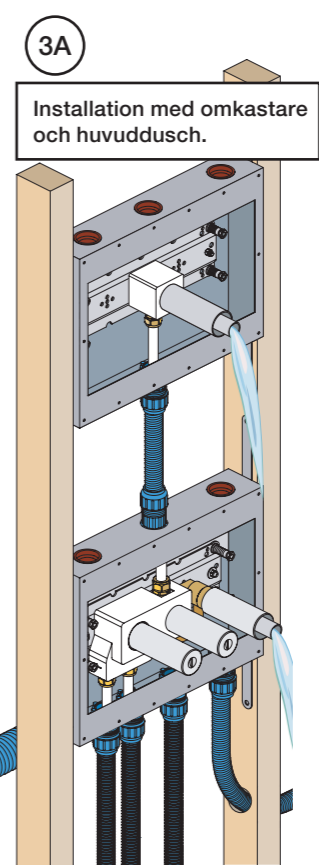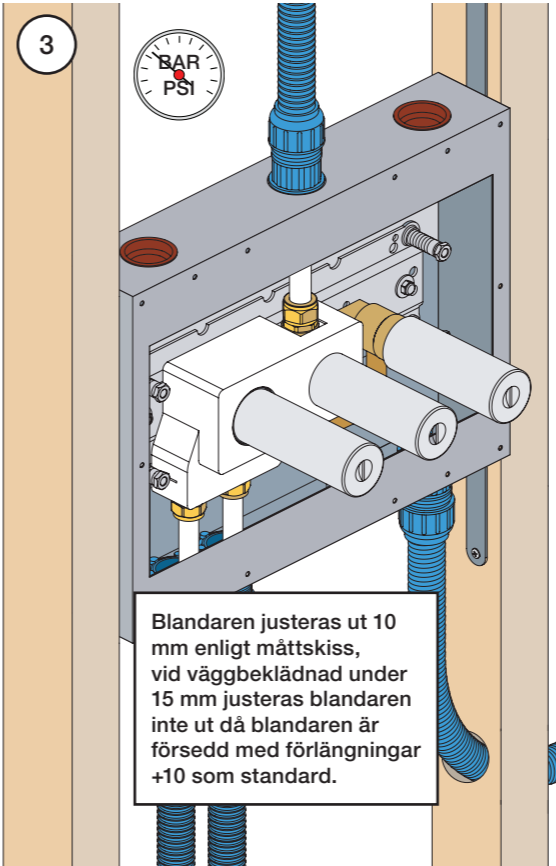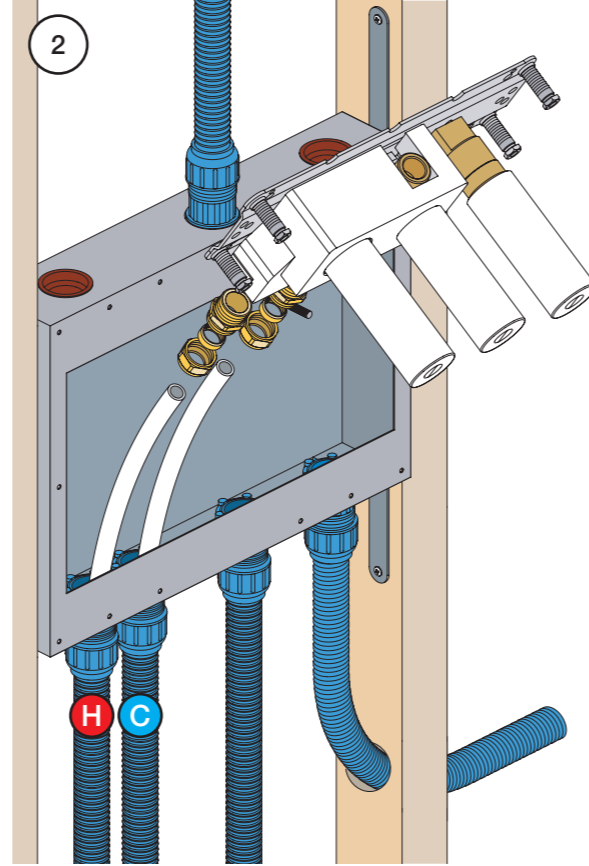

Blandaren justeras ut 10 mm enligt måttskiss,  
vid vägbeklädnad under 15 mm justeras blandaren  
inte ut då blandaren är försedd med förlängningar  
+10 som standard.



- NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C  
 NR19: VR2A, VR22, VR665, VR1419  
 VR277K: VR22, VR269, VR277  
 VR1260: VR1259, VR1260, VR2251  
 VR1400: VR21, VR23, VR406, VR1902, VR2213

|                         |                                       |   |                          |
|-------------------------|---------------------------------------|---|--------------------------|
| <p>400V</p> <p>2927</p> | <p>400NV</p> <p>400TV</p> <p>2926</p> | <p>400FV</p> <p>400RV</p> <p>2927</p> <p>2928</p> | <p>400DV</p> <p>2928</p> |
| <p>1045</p>             | <p>3003KB</p>                         | <p>3003</p>                                       | <p>-</p>                 |
| <p>3001, 001G</p>       | <p>3001, 001G, 001</p>                | <p>3001, 001G, 001</p>                            | <p>001G</p>              |



**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 400**  
 400V/FV/NV/RV/TV/D

Date  
 May. 22

Rev.  
 9

Sheet  
 SB 3.2